

# **FAST BREAK** Quarry & Hard Tile Cleaner

Limpiador De Losa y Superficies Duras



### **Availability:**

Packaging	ltem #
4-1 F Gal.:	106382 F
2-2.5 Gal.:	106386
Pail/ 5 Gal.:	106378
Drum/ 55 Gal.:	106387

Quarry Tile Azulejo de la mina



Tile and Grout Azulejo y la lechada

# DESCRIPTION

This product is a special blend of mild organic acids coupled with powerful penetrants designed to remove slippery grease and soapy build-up from quarry tile and concrete floors. It deep cleans by penetrating and re-opening the pores of the floor. When used properly, this product can help prevent slipping while promoting cleanliness in kitchens, meat-rooms, delis, cafeterias, and anywhere else greasy soiled floors may be a problem. Can be used on quarry tile, concrete, glazed tile, resilient tile and vinyl floors. It will penetrate, clean and brighten tile grouting. DO NOT let product stand on polished marble, wood, aluminum, nylon carpet or painted surfaces. If uncertain, test in a small inconspicuous area before using.



\*Hazardous Material according to D.O.T.





Scan for product's Safety Data Sheet

# **FAST BREAK** Quarry & Hard Tile Cleaner

#### **FEATURES**

#### BENEFITS

- Deep cleans
- Dual action
- Removes grease

- Penetrates grout floors • Cleans and brightens grout
- Prevents slipping

#### **AREAS OF USE:**

- Restaurants • Food Processing • Cafeterias
  - Concrete
    - Tile and Grout
- Kitchens
- Meatrooms

• Quarry Tile

Odor: **Fragrance Free** 

Color:

Colorless

Base: Sequestering acids

SPECIFICATIONS:

pH (Conc.): < 2

**Recommended Dilution:** RTU - 1:16

Solids: N/A

Viscosity: Slightly viscous

Foam: High

**Detergency:** Very good

**Rinsability:** Excellent

**Flash Point:** None

Storage/Stability: 2 years

Weight Per Gallon: 8.77bs./gal.

Freeze/Thaw Stability: Keep from freezing

# DIRECTIONS


Remove food and equipment from area before using.

Dilute product according to guidelines below:

DAILY CLEANING: Dilute product using 4 oz. per each gallon of water.

HEAVILY SOILED GREASY FLOORS: Pre-wet floor using water and apply full strength

Apply solution directly onto floor and spread with a mop or deck brush (alternatively, solution may be applied with a foaming applicator). Allow product to dwell for 5 minutes and agitate with a brush. Remove solution with squeegee or wet-vac, rinse well, and dry floor with squeegee or wet-vac.

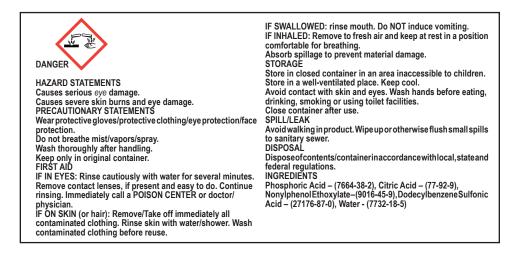

048 Stinson Drive, Reading PA 1960 Phone: 1-800-548-4568 www.miscoproducts.com